

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04Q		A2	(11) International Publication Number: WO 98/32290
			(43) International Publication Date: 23 July 1998 (23.07.98)
(21) International Application Number: PCT/US98/01258			(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).
(22) International Filing Date: 21 January 1998 (21.01.98)			
(30) Priority Data: 08/787,593 22 January 1997 (22.01.97) US			
(71) Applicant (for all designated States except US): STANFORD TELECOMMUNICATIONS, INC. [US/US]; 1221 Crossman Avenue, Sunnyvale, CA 94089-1117 (US).			
(72) Inventors; and (75) Inventors/Applicants (for US only): NATALI, Francis, D. [US/US]; 1840 36th Street, Port Townsend, WA 98368 (US). OHLSON, John, E. [US/US]; 2706 Ramos Court, Mountain View, CA 94040 (US).			
(74) Agents: WOODWARD, Henry, K. et al.; Townsend and Townsend and Crew LLP, 8th floor, Two Embarcadero Center, San Francisco, CA 94111-3834 (US).			Published Without international search report and to be republished upon receipt of that report.
(54) Title: POWER EFFICIENT PAGING FOR MOBILE USERS IN A TERRESTRIAL AND SATELLITE COMMUNICATIONS SYSTEM			
(57) Abstract <p>A method of paging assigns a unique digital address to mobile stations with each unique digital address being mapped into an orthogonal signal set which is then transmitted to all mobile stations. Each mobile station then correlates a received orthogonal signal function against an orthogonal function corresponding to its address. More particularly, each orthogonal signal set comprises a binary orthogonal signal set such as a set of Rademacher-Walsh functions. Other well-known orthogonal function sets can be employed. For example, an mbit address can be partitioned into g binary sequences and each sequence is then uniquely mapped into one of $2^{m/g}$ orthogonal functions.</p>			

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

POWER EFFICIENT PAGING FOR
MOBILE USERS IN A TERRESTRIAL
AND SATELLITE COMMUNICATIONS SYSTEM

5

BACKGROUND OF THE INVENTION

This invention relates generally to mobile communications systems such as cellular telephone and satellite systems, and more particularly the invention relates to the paging of mobile users in such systems.

Mobile satellite systems and cellular systems are generally star configured, with all communications going through a ground station. The outbound ground to mobile link is referred to as the Forward Link (FL). Satellite systems usually employ multibeam antennas providing coverage which has some similarity to a cellular system. The FL in each beam is received by all active user terminals (UT) within the beam. The FL generally consists of common control channels which are monitored by all users, user associated control channels, traffic channels, and synchronization overhead.

Terrestrial cellular telephone systems such as AMPS, GSM, and IS-95 all include forward link paging channels where "paging" is defined as "the act of seeking a mobile station when an incoming call from the land station has been placed to it". See Lee W.C.Y., Mobile Cellular Telecommunication Systems, McGraw-Hill Book Company, 1989. In each case, the Paging Channel is similar in structure to a control channel and carries a message containing the address of the user terminal (UT) that is being called. In the case of IS-95, the paging channel can operate at rates of up to 9600 bps.

Satellite systems differ from terrestrial system in a number of important ways -- one of the most important is that forward link power is a scarce and precious resource. Link margins are necessarily limited and it is desirable to keep the overhead due to paging to a minimum.

There are a number of global and regional mobile satellite systems designed to work with handheld UT's that are presently in the proposal or development stage. These include Odyssey, Globalstar, ICO and Thuraya, among others.

Typically, a handheld UT which is available to receive incoming calls would monitor a common control channel used for paging and listen for its user address. The paging may be organized in "paging groups" so that the UT only listens to pages at certain times (e.g. once every 2 seconds) rather than continuously. This allows the terminal to shut down part of the time and save battery power. If the UT detects a page, it responds and call set-up proceeds. The paging operation is usually done at the normal control channel data rate and requires an Eb/No of from 3 to 9 dB depending on the amount of coding, the type of modulation employed, and the desired performance. The total received energy in the page is:

$$E_T = mP_sT_b;$$

where:

m = number of bits in the paging message;

P_s = received signal power; and

T_b = data bit period.

Some satellite systems are considering a "deep paging" function. The purpose of deep paging would be to alert a shadowed user, who could not detect the ordinary traffic or control channels due to signal attenuation, that there was an incoming call. The user could then move to a more favorable location, such as a window if he

were inside a building. Deep paging would typically take place at signal levels of 25 dB or more below nominal. The deep paging message would typically be sent at a very low data rate to accommodate the low signal level. This makes coherent detection problematic due to UT phase noise, as well as channel coherence times. Noncoherent detection is much more attractive but is not as power efficient.

The present invention is directed to a paging system with increased power efficiency and having the robustness of noncoherent detection.

SUMMARY OF THE INVENTION

Briefly, a method of paging in accordance with the invention assigns a unique digital address to mobile stations with each unique digital address being mapped into a unique member of an orthogonal signal set. The appropriate orthogonal function corresponding to a particular address is then transmitted to all mobile stations. Each mobile station then correlates the received orthogonal signal function against an orthogonal function corresponding to its address.

More particularly, in accordance with a preferred embodiment, each orthogonal signal set comprises a binary orthogonal signal set such as the Rademacher-Walsh functions. Other well-known orthogonal function sets can be employed. For example, an m bit address can be partitioned into g binary sequences and each sequence is then uniquely mapped into one of $2^{m/g}$ orthogonal functions.

Each mobile station implements a single correlator matched to its unique address, and paging then becomes a simple signal detection problem with a single threshold on the correlator output which can be set based on a desired false alarm rate.

The invention and objects and features thereof will be more readily apparent from the following detailed description and appended claims when taken with the drawings.

5

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a schematic representation of a satellite communications system in which the invention can be employed.

10

Fig. 2 is a functional block diagram of a paging transmitter in accordance with one embodiment of the invention.

15

Fig. 3 is a functional block diagram of a paging detector in a mobile station in accordance with one embodiment of the invention.

Fig. 4 illustrates a forward link waveform with orthogonal function paging in accordance with the invention.

20

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Fig. 1 is a representation of a mobile communication system in which the present invention is applicable. The system can be a cellular telephone system or a mobile satellite system which are generally star configured with all communications going through a ground station 10. As noted above, cellular systems usually employ multibeam antennas which provide coverage in a forward link to all active user terminals (UT) 12 within the beam. In a satellite system, the forward link from ground station 10 can include one or more satellites 14.

25

30

In accordance with the present invention, paging from the ground station 10 to the mobile user terminals 12 employs the mapping of each unique terminal address to a unique orthogonal paging function, as

35

illustrated in Fig. 2 for the paging source 20 and the mapping function 22. A pseudo-noise generator 24 generates a PN cover code which is applied to a modulo two adder along with the orthogonal paging code which then drives a binary phase shift key modulator 28. The modulated signal is then up converted at 30 for transmission from antenna 32.

As shown in Fig. 3, each mobile station has a receive antenna 40 for receiving the transmitted signal. A downconverter 42 and I/Q mixer 44 recover the complex baseband signal ($I+jQ$) which is then applied to an analog to digital converter 46. The resulting digital signal is then applied to a mixer 48 and a synchro-burst time tracking unit 50 which provides timing to a PN cover code generator 52. The output of the PN cover code is applied to mixer 48 with the output applied to a second mixer 54 along with a signal from the orthogonal paging function unit 56. The orthogonal paging function of unit 56 is selected based on the input UT address. A summer 58 and detector 60 provide an output to a detection threshold unit 62. The detection threshold unit 62 then drives detection logic 64 which provides a paging alert when an address is detected.

Fig. 4 represents a typical forward link waveform with orthogonal function paging as used in the system of Figs. 2 and 3.

Convenient constructions of orthogonal binary functions of length n (where n is a multiple of 4) are generally based on constructing an $n \times n$ Hadamard matrix, the rows of which are the desired orthogonal functions. These matrices are conjectured to exist for any length that is a multiple of 4, although this has not been proved. The Rademacher-Walsh (or the Hadamard-Walsh) functions are one well known type of orthogonal function with length 2^m . Sylvester matrices are Hadamard matrices

of order 2^m and are easily constructed for any m . These are other constructions, which are not limited to orders which are a power of 2.

One convenient construction is to form a
5 $(2^m-1) \times (2^m-1)$ matrix whose rows are all the cyclic shifts of a maximal length sequence of length (2^m-1) . This matrix is then augmented with a first row of all 1's and a first column of all 1's, forming a $2^m \times 2^m$ matrix with orthogonal rows.

10 Note that it may be convenient to choose orthogonal functions with lengths that are not of the form 2^m . For example, if the address group is sized at 224 addresses, a set of orthogonal functions of length 224 may be employed.

15 If the FL carries an orthogonal function which is unique to a particular user, the UT can employ a correlator with the orthogonal waveform corresponding to its address. The correlator will respond when the proper function is received. In this way, the paging operation
20 becomes a signal detection problem rather than a data detection problem. This can offer considerable advantage in detection efficiency, even in a noncoherent configuration.

In the discussion above, 2^m chips are
25 transmitted to convey an m bit address, i.e. a bandwidth expansion is required. If the air interface employs direct sequence (DS) spread spectrum signaling, the chips of the orthogonal address function would be transmitted at the spreading function chip rate (or less). In this
30 case, there is no additional bandwidth expansion over what is already being used. Further, if desired, the orthogonal function can be covered with a PN sequence which is common to all users.

It should be noted that the scheme described
35 here is not the same as orthogonal coding such as used on

the reverse link of IS-95. In the case of orthogonal coding of data, the user implements a decoder which correlates against all possible sequences and compares the correlater outputs to determine which data was sent. The complexity of such a decoder necessarily limits the length of the orthogonal sequences employed. Further, since multiple outputs are being compared, the problem is one of correctly selecting the correlater which matches the transmitted sequence. In the paging technique described here, the UT implements only a single correlater matched to its unique sequence. The problem then becomes a simple signal detection problem with a single threshold on the correlater output which is set based on the desired false alarm rate. The simplicity of this implementation is a decided advantage in a handheld UT.

An implied requirement of the above scheme is that the UT be synchronized to the FL signal. This is, of course, a requirement for the paging techniques that rely on data transmission as well, so there is no additional requirement in the orthogonal signaling scheme. It is however, advantageous to have a means to maintain synchronization at low signal levels for "deep paging". One way to do this is to transmit a PN sequence of short duration as a synchronization burst at periodic intervals. No other signals are active during this synchronization burst (note that this is very different from the Pilot Channel of IS-95 which is transmitted continuously in conjunction with the other signals and uses one of the Hadamard-Walsh access codes for isolation).

The energy required to send a page is:

$$E'_P = NP_s T_C i$$

where:

N = length of the orthogonal function; and

TC = chip period.

The ratio of the energies required for orthogonal paging as compared to conventional paging is:

$$\Gamma = \frac{E'_P}{E_P} = \frac{N \frac{P'_S}{N_0} T_C}{m \frac{P_S}{N_0} T_b} = \frac{(SNR_1)_{Req'd}}{m \left(\frac{E_b}{N_0} \right)_{Req'd}} \quad (1)$$

If Γ is evaluated for a typical situation where $m=24$,
 5 $(SNR_1)_{Req'd} = 13.6$ dB for $P_D=0.99$. $P_{FA}=3 \times 10^{-5}$, and

$$\left(\frac{E_b}{N_0} \right)_{Req'd} = 7.6 \text{ dB for } P_e = 3 \times 10^{-4}, \text{ then } \Gamma = -7.9 \text{ dB.}$$

That is, for this example, orthogonal paging requires about 8 dB less power than conventional paging.

As a variation on the above technique, the UT
 10 address can be partitioned into two or more equal groups of bits and a smaller set of orthogonal functions employed. For example, a 24 bit address could be partitioned into two 12 bit groups, and a $2^{12} \times 2^{12}$ orthogonal signal set employed. This reduces
 15 transmission time by a factor of 5×10^{-4} for the same chipping rate! Now, however, every address will have 23 neighbors that are only 3 dB down in correlation (all other addresses remain orthogonal). These near neighbors dominate the false paging performance at high SNRI, but
 20 this is still a valuable technique for trading power for transmission length, especially at low SNR's. A typical FL waveform with orthogonal paging is shown in Fig. 4.

While the invention has been described with
 reference to a specific embodiment, the description is
 25 illustrative of the invention and is not to be construed as limiting the invention. Various modifications and

applications may occur to those skilled in the art without departing from the true spirit and scope of the invention as defined by the appended claims.

WHAT IS CLAIMED IS:

1. In a mobile communication system in which a ground station communicates with mobile stations, a method of paging a mobile station from the ground station comprising the steps of:

a) assigning a unique digital address to each mobile station;

b) mapping each unique digital address into a unique member of an orthogonal signal set;

c) transmitting the unique member of the orthogonal signal corresponding to the mobile being paged to some or all mobile stations; and




d) each mobile station correlating a received orthogonal signal set against the orthogonal function corresponding to its address.

2. The method as defined by claim 1, wherein said orthogonal signal set comprises a binary orthogonal signal set.

3. The method as defined by claim 2, wherein said binary orthogonal signal set comprises a set of Radamacher-Walsh functions.

4. The method as defined by claim 3, wherein an mbit address is partitioned into g binary sequences and each sequence is uniquely mapped into one of $2^{m/g}$ orthogonal functions.

5. The method as defined by claim 4, wherein the signal from a ground station is relayed through at least one satellite.

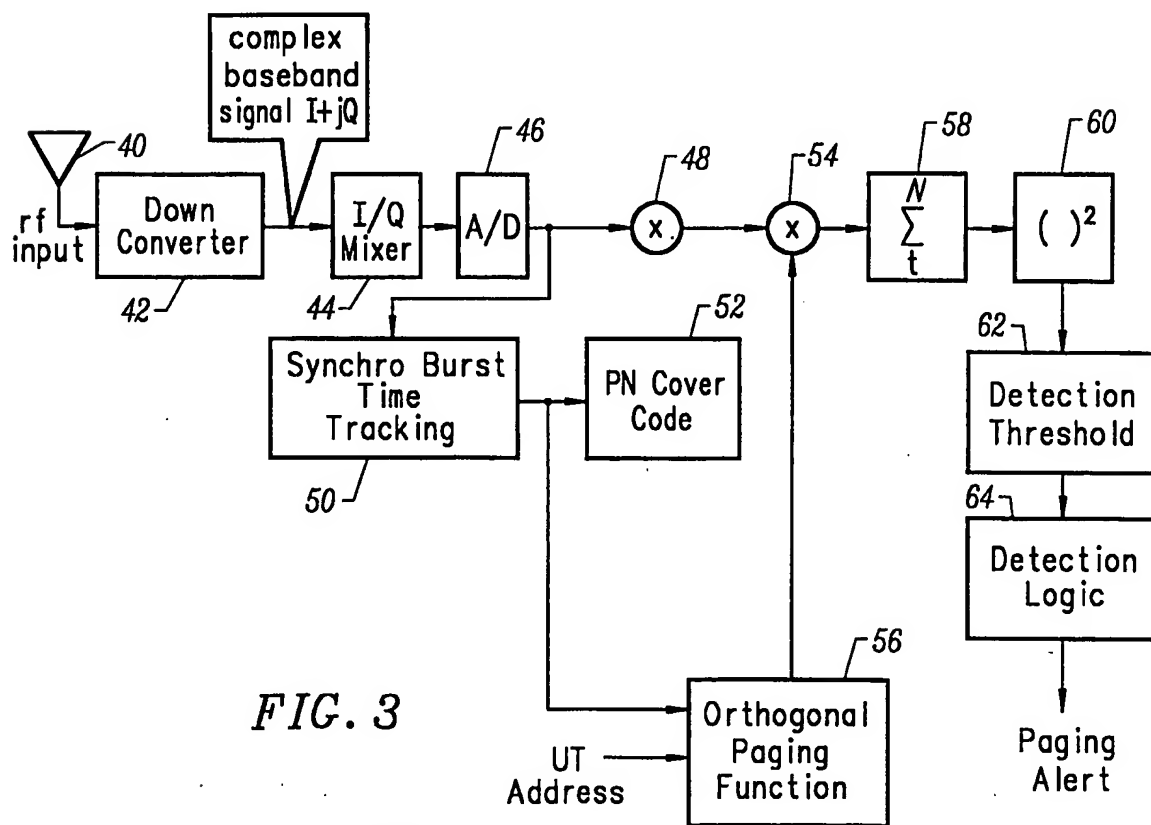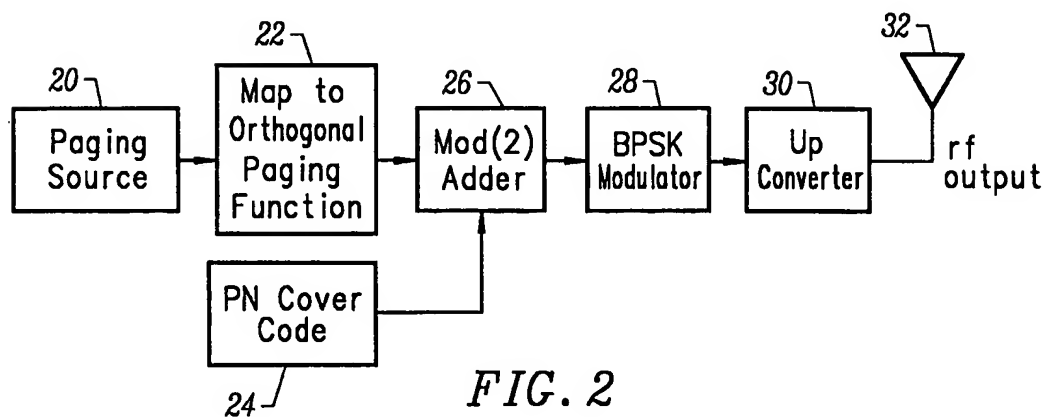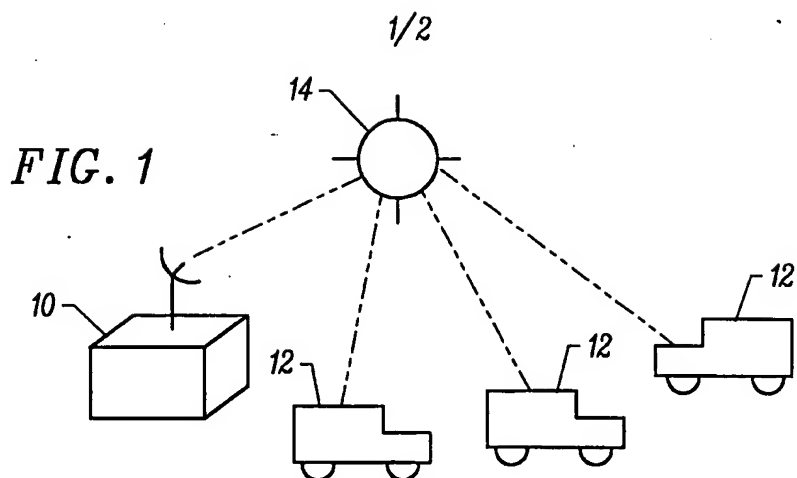

2/2

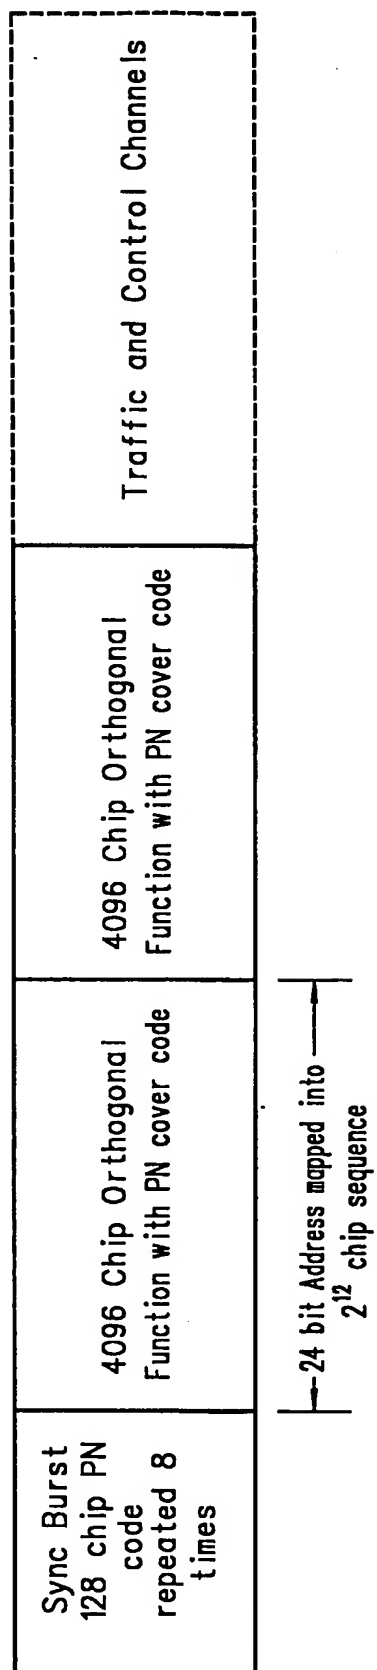


FIG. 4

PCT


WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04K 1/10, H04J 13/00		(11) International Publication Number: WO 98/32290
A3		(43) International Publication Date: 23 July 1998 (23.07.98)
<p>(21) International Application Number: PCT/US98/01258</p> <p>(22) International Filing Date: 21 January 1998 (21.01.98)</p> <p>(30) Priority Data: 08/787,593 22 January 1997 (22.01.97) US</p> <p>(71) Applicant (for all designated States except US): STANFORD TELECOMMUNICATIONS, INC. [US/US]; 1221 Crossman Avenue, Sunnyvale, CA 94089-1117 (US).</p> <p>(72) Inventors; and</p> <p>(75) Inventors/Applicants (for US only): NATALI, Francis, D. [US/US]; 1840 36th Street, Port Townsend, WA 98368 (US). OHLSON, John, E. [US/US]; 2706 Ramos Court, Mountain View, CA 94040 (US).</p> <p>(74) Agents: WOODWARD, Henry, K. et al.; Townsend and Townsend and Crew LLP, 8th floor, Two Embarcadero Center, San Francisco, CA 94111-3834 (US).</p>		<p>(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).</p> <p>Published With international search report.</p> <p>(88) Date of publication of the international search report: 5 November 1998 (05.11.98)</p>

(54) Title: POWER EFFICIENT PAGING FOR MOBILE USERS IN A TERRESTRIAL AND SATELLITE COMMUNICATIONS SYSTEM

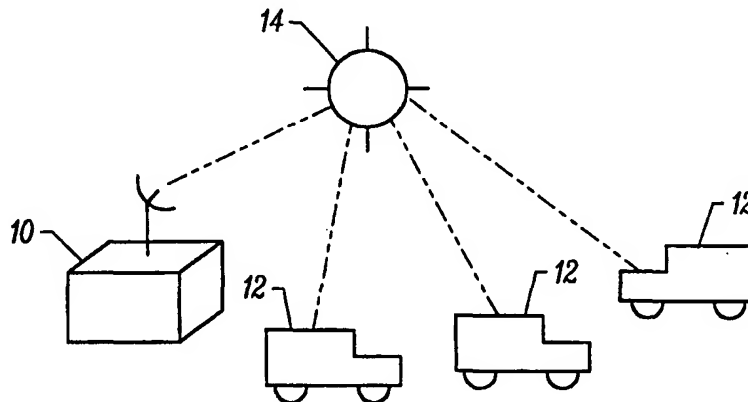

(57) Abstract

A method of paging assigns a unique digital address to mobile stations (12) with each unique digital address being mapped into an orthogonal signal set which is then transmitted to all mobile stations (12). Each mobile station (12) then correlates a received orthogonal signal function against an orthogonal function corresponding to its address. More particularly, each orthogonal signal set comprises a binary orthogonal signal set such as a set of Rademacher-Walsh functions. Other well-known orthogonal function sets can be employed. For example, an mbit address can be partitioned into g binary sequences and each sequence is then uniquely mapped into one of 2 to the power of m/g orthogonal functions.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakistan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US98/01258

A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) : H04K 1/10; H04J 13/00

US CL : 375/200, 205; 370/18,19, 320; 380/34

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 340/825.31, 825.44; 375/200, 205; 370/18,19, 320; 380/34; 455/435, 436, 437, 450, 502

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
NONE

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

APS

search terms: communication# system, mobile station#, map?, orthogonal signal, orthogonal function

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 4,901,307 A (GILHOUSEN et al.) 13 FEBRUARY 1990, fig. 2, col. 8, lines 12 - 16, col. 10, lines 52 - 58, col. 11, lines 33 -35, col. 13, lines 9 - 12 and 61 - 63, claims 1- 4	1 - 5
Y	US 5,497,395 A (JOU) 5 MARCH 1996, see entire document	1 - 5

☐ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

* Special categories of cited documents:	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
A document defining the general state of the art which is not considered to be of particular relevance	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
B earlier document published on or after the international filing date	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*A* document member of the same patent family
O document referring to an oral disclosure, use, exhibition or other means	
P document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

03 APRIL 1998

Date of mailing of the international search report

10 JUL 1998

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

JEAN JEANGLAUBE

Telephone No. (703) 305 -2701